


TECHNICAL DATA SHEET

Diagram

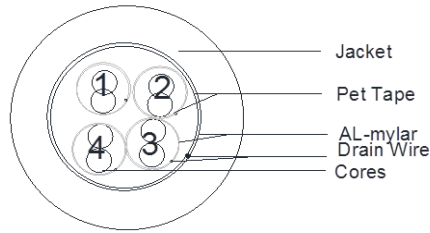

Description

Cable Part Code*	I38A1KS04
Cable Type	4x2x18AWG PVC/IS/OS/PVC Multi Pair Cables

Conductor

Conductor Material	Bare copper
Conductor Size	18AWG
Conductor Stranding Standard	IEC 60228-Class-2
Conductor Stranding (No. of Strands/Diameter)	7/0.380

Insulation

No. of Cores/Pair/Triad/Quad	4P
Insulation Material	PVC
Insulation Color Code	Black&White with number coding 1-4

Shielding

Shielded/Unshielded	Individual & Overall BeldFoil Shield Plus Tinned Copper Drain Wire
---------------------	--

Outer Jacket/Sheath Material

Outer Jacket Material	PVC
Nom. Outer Jacket Thickness (mm)	1.1
Nom. Overall Diameter (mm)	12.7

Physical/Mechanical Properties

Temperature Rating	-30°C+70°C
Oil Resistance	Yes
UV Resistance	Yes (only black, gray)

Electrical Properties

Voltage Rating (V)	500V
Max. Conductor Resistance @20° C	21.83
Max Mutual Capacitance Core to Core @1KHz	250.00
Max. Inductance to Resistance Ratio L/R	25.00

© 2009 Belden, Inc
All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability. Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale.